

Päivämäärä: 5.7.2020
Asiakas: Petri Väikäs




Kansi: BMW N57
Imuventtiili: 27.2mm
Pakovenntiili: 24.6mm

Imuventtiili: 28.5mm
Pakovenntiili: 24.6mm

Vakio	Virtaus cfm@28" h2o			
Nosto mm	Imu	Pako	E/I %	Teor. HP
2	54.5	53.3	97.9	84
4	94.7	113.4	119.7	146
6	118.4	128.4	108.5	183
8	121.8	131.2	107.7	188
10	123.8	130.9	105.7	191
12	127.2	129.5	101.8	196
14	129.7	128.0	98.7	200

Portattu	Virtaus cfm@28" h2o				Ero vakioon %	
Nosto mm	Imu	Pako	E/I %	Teor. HP	Imu	Pako
2	57.9	65.9	113.8	89	6.3	23.5
4	117.3	117.8	100.4	181	23.8	3.8
6	146.7	144.0	98.1	226	23.9	12.1
8	158.0	145.9	92.3	244	29.8	11.2
10	161.1	142.6	88.5	248	30.1	9.0
12	165.6	143.2	86.5	255	30.1	10.5
14	167.2	141.8	84.8	258	28.9	10.8

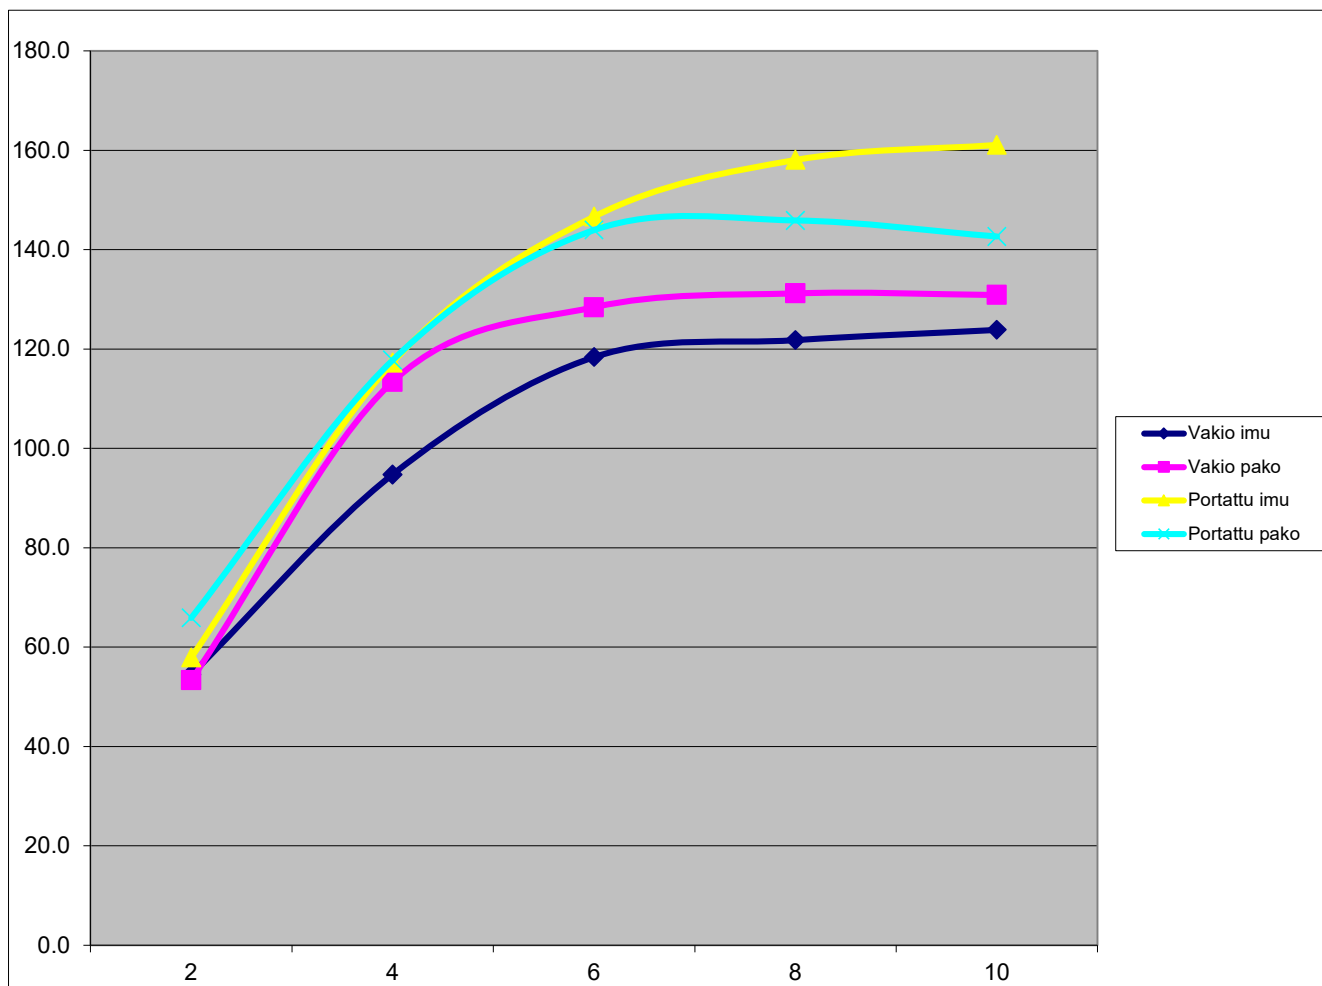

Muistiinpanoja: